

RT-MINI

Self-flashing base for asphalt & metal roof-top PV mounting systems

RT-MINI is suitable for mounting any rail system with a conventional L-Foot.



Dual bolt design: M8 or 5/16" for L-Foot & 1/4" for EMC




Installation Manual



ICC ESR 3575

Easy tapping screw guide


1/4" Hex Bolt upper channel

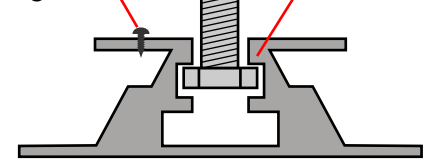

Flat lip for PV Cable clips

M8 or 5/16"

Hex Bolt bottom channel

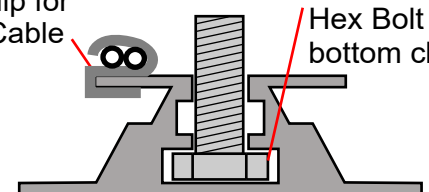

 Roof Tech

The Standard for Waterproof Flexible Flashing Since 1994
www.roof-tech.us info@roof-tech.us

RT-MINI

Flexible Flashing certified by the International Code Council (ICC)

Engineered to ASTM D 1761 (Standard Test Methods for Mechanical Fasteners in Wood)

Components

RT2-00-MINIBK





MINI base : 20 ea.
Screw : 40 ea.
Extra RT-Butyl : 10 ea.

Optional item

5 x 60mm Mounting screw (RT2-04-SD5-60) : 100 ea./Bag
5/16" Hex bolt, washer & nut set (RT-04-BN30SL-US) : 100 ea./Bag
RT-Butyl (RT2-04-BUTYLT) : 10 ea./Box

RT-Butyl is Roof Tech's flexible flashing used in one million residential PV systems for the last 26 years. It is the first PV mounting system with Flexible Flashing certified by the ICC. Engineered to withstand wind speeds up to 180 mph and ground snow up to 90 psf.

Metal Flashing Retrofit Flexible Flashing

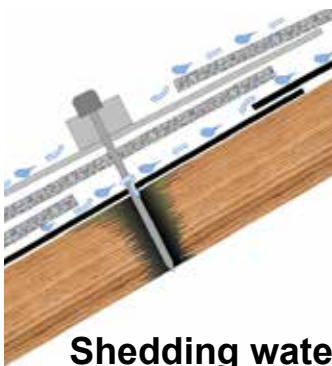


Shedding water? **100% Waterproof**


ICC ESR-3575 ASTM2140 testing UV testing (7500 hrs.)




Dimensions in (mm)

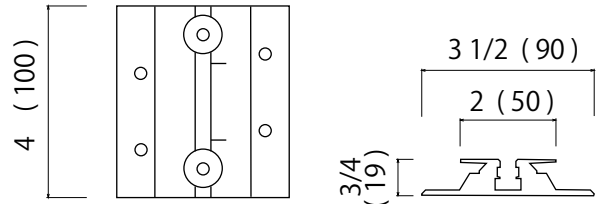

Rafter installation

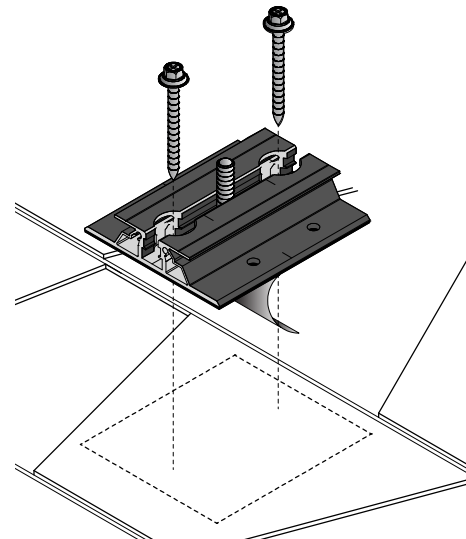

Deck installation

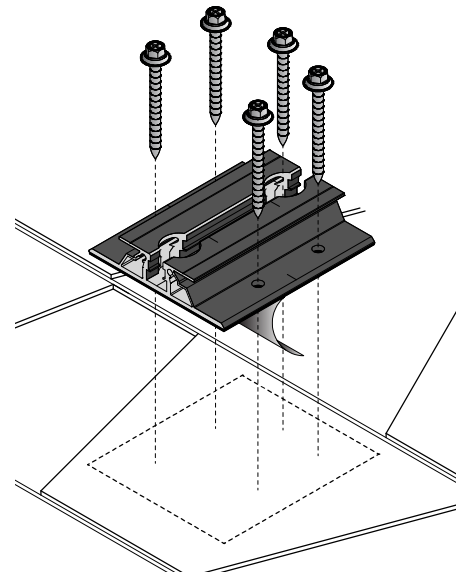

P.E. Stamped Letters available at www.roof-tech.us/support
TAS 100 A on metal and asphalt roof.

Roof Tech Inc.

www.roof-tech.us

info@roof-tech.us

10620 Trenea Street, Suite 230, San Diego, CA 92131

858.935.6064

March 2020